

## Female Header 2.0mm SMT / SMT R/A Type


### Specifications

Current Rate: 2 AMP  
Insulation Resistance: 1000MΩ Min.  
Contact Resistance: 20mΩ Max.  
Dielectric Voltage: 500V AC for one minute  
Operation Temperature: -40°C to +105°C





### Material

Insulator: Hi-Temp. Thermoplastic, UL 94V-0  
Terminal: Copper Alloy  
Plating: Gold Plated

## ORDER INFORMATION

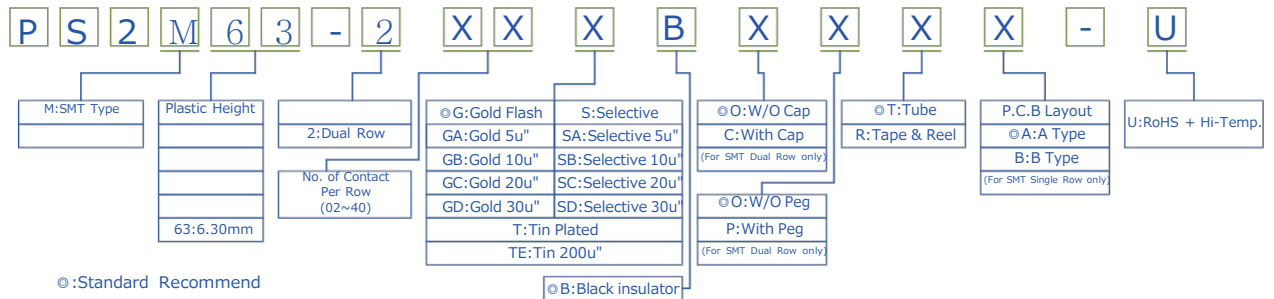

## Female Header 2.0mm 2 Row H=6.35mm SMT Type

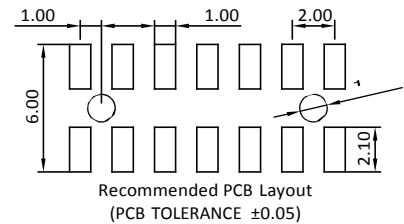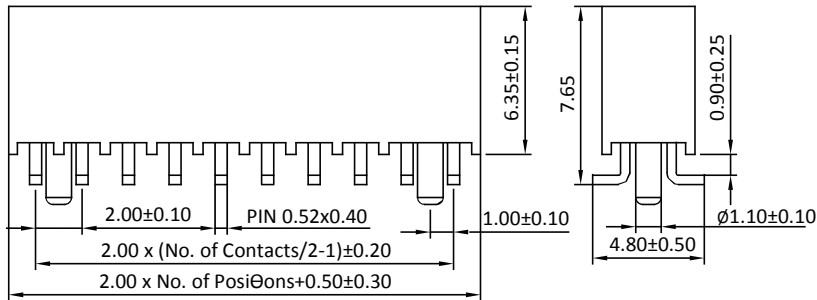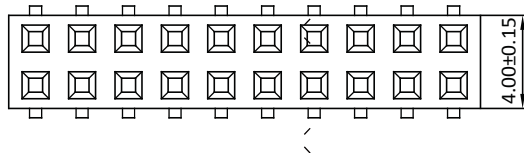

Part No. PS2M63-2XX-U

Female Header 2.0mm