

Female Header 2.0mm SMT / SMT R/A Type


Specifications

Current Rate: 2 AMP
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 20mΩ Max.
Dielectric Voltage: 500V AC for one minute
Operation Temperature: -40°C to +105°C




Material

Insulator: Hi-Temp. Thermoplastic, UL 94V-0
Terminal: Copper Alloy
Plating: Gold Plated

ORDER INFORMATION

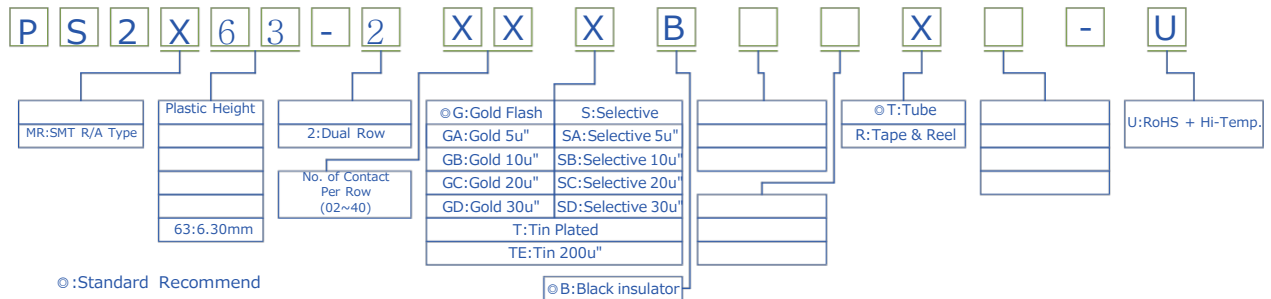

Female Header 2.0mm 2 Row H=6.35mm SMT R/A Type

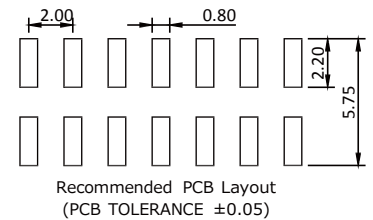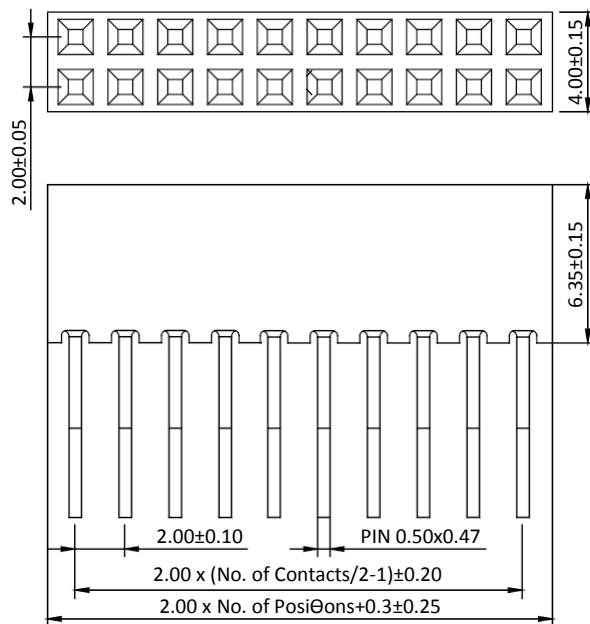

Part No.: PS2MR63-2XX-U

Female Header 2.0mm