



Female Header 2.0mm Side Entry SMT & DIP / Elevated SMT / Straight & Press Fit Type


Specifications

Current Rate: 2 AMP
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 20mΩ Max.
Dielectric Voltage: 500V AC for one minute
Operation Temperature: -40°C to +105°C


Material

Insulator: P.B.T or Hi-Temp. Thermoplastic, UL 94V-0
Terminal: Copper Alloy
Plating: Gold Plated


ORDER INFORMATION

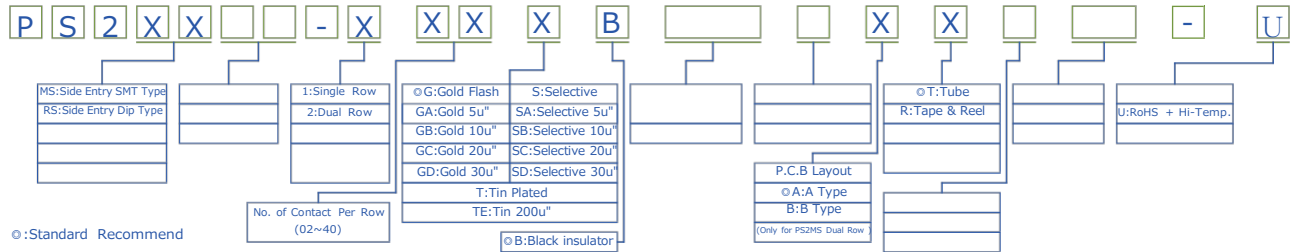

Female Header 2.0mm 1 & 2 Row Side Entry SMT Type

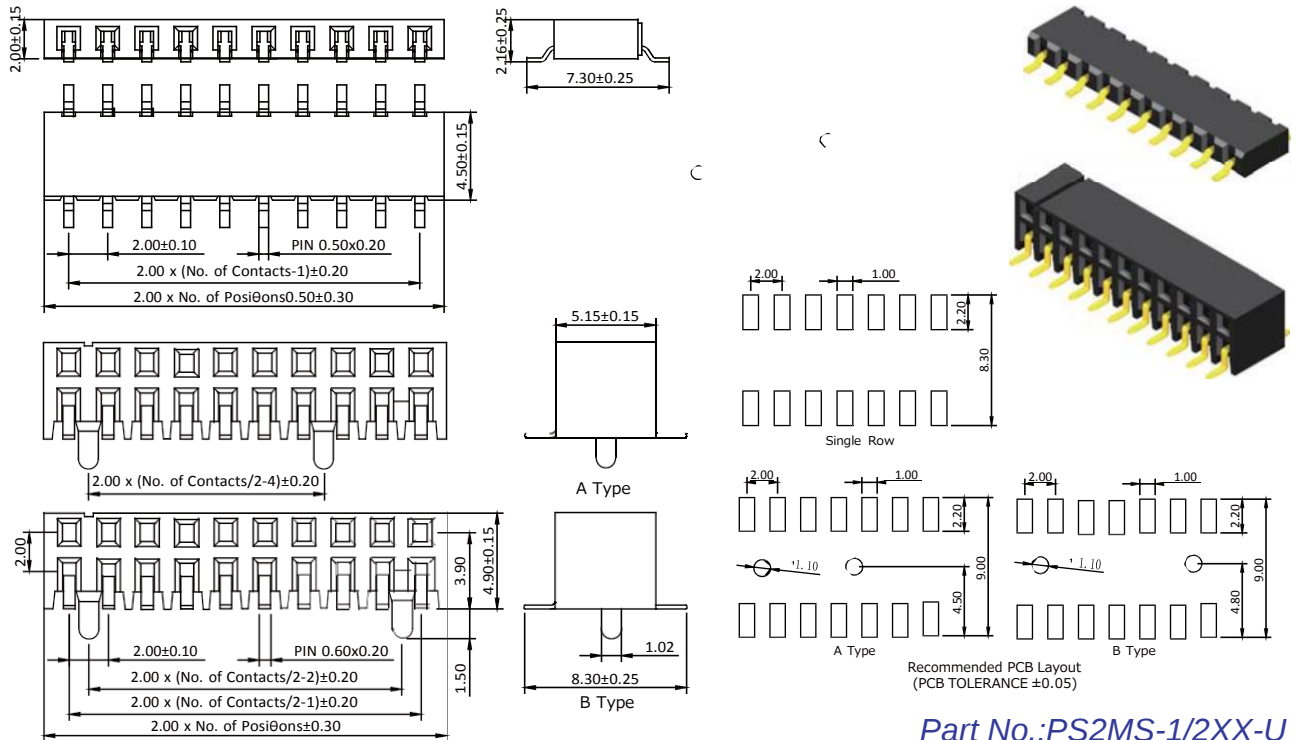

Female Header 2.0mm 1 & 2 Row Side Entry DIP Type

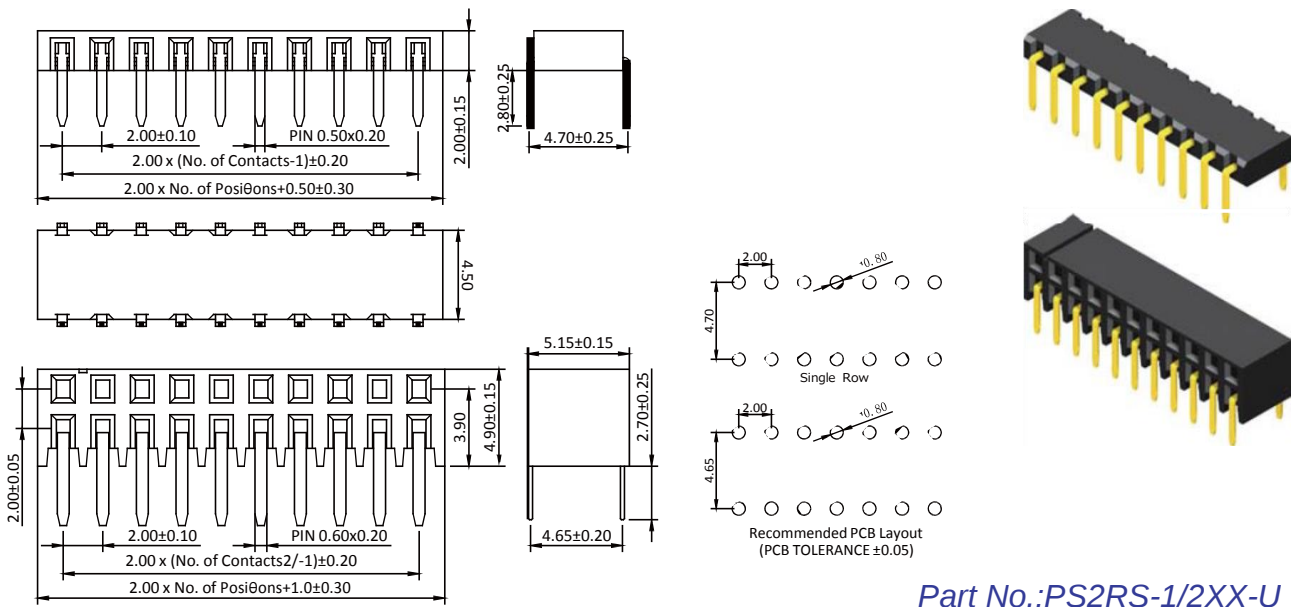

Female Header 2.0mm