

Female Header 2.0mm Right Angle / Straight / Dual Entry Type


Specifications

Current Rate: 2 AMP
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 20mΩ Max.
Dielectric Voltage: 500V AC for one minute
Operation Temperature: -40°C to +105°C





Material

Insulator: P.B.T or Hi-Temp. Thermoplastic, UL 94V-0
Terminal: Copper Alloy
Plating: Gold Plated

ORDER INFORMATION




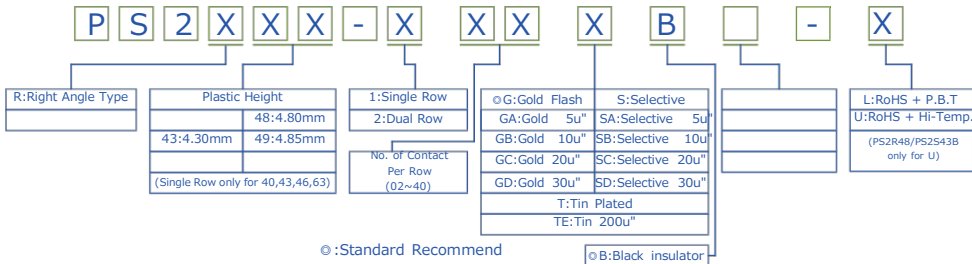


Female Header 2.0mm 1 Row H=4.3mm Right Angle Type

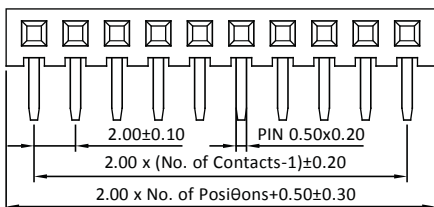






Part No.: PS2R43-1XX-L/U

Female Header 2.0mm 2 Row H=4.8mm Right Angle Type

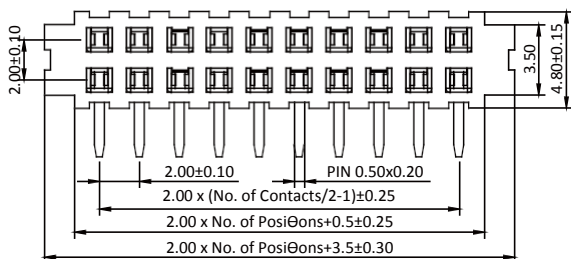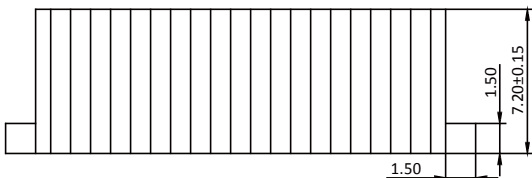

Part No.: PS2R48-2XX-U

Female Header 2.0mm 2 Row H=4.85mm Right Angle Type

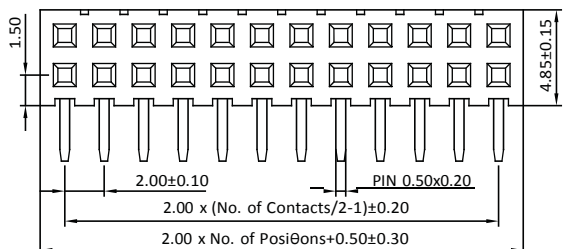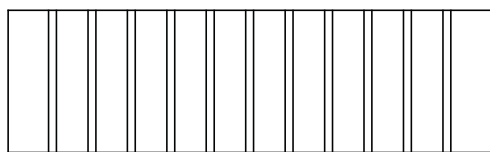

Part No.: PS2R49-2XX-L/U

Female Header 2.0mm