

Female Header 2.0mm Right Angle / Straight / Dual Entry Type

Specifications

Current Rate:2 AMP
Insulation Resistance:1000MΩ Min.
Contact Resistance:20mΩ Max.
Dielectric Voltage:500V AC for one minute
Operation Temperature:-40°C to +105°C

Material


Insulator:P.B.T or Hi-Temp. Thermoplastic, UL 94V-0
Terminal:Copper Alloy
Plating:Gold Plated

ORDER INFORMATION

P	S	2	R	X	X	-	X	X	X	B		-	X
R:Right Angle Type		Plastic Height		1:Single Row		2:Dual Row		G:Gold Flash		S:Selective		L:RoHS + P.B.T	
		63:6.30mm						GA:Gold 5u"		SA:Selective 5u"		U:RoHS + Hi-Temp.	
								GB:Gold 10u"		SB:Selective 10u"			
								GC:Gold 20u"		SC:Selective 20u"			
								GD:Gold 30u"		SD:Selective 30u"			
								T:Tin Plated					
								TE:Tin 200u"					

◎:Standard Recommend ○B:Black insulator

Female Header 2.0mm 1 & 2 Row H=6.35mm Right Angle Type

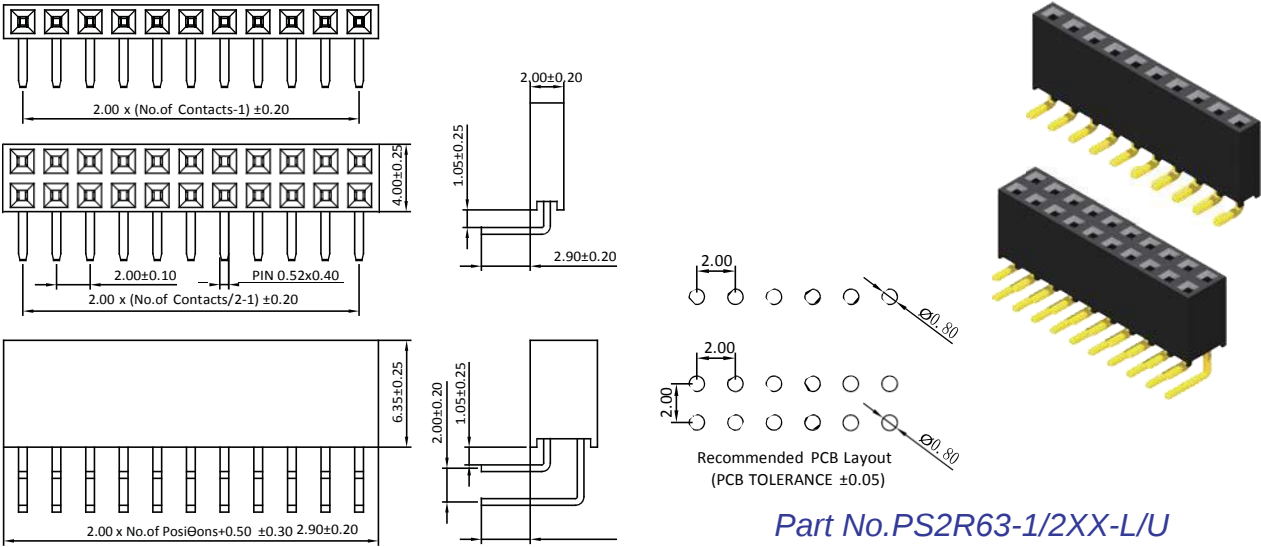

Female Header 2.0mm