

Female Header 2.0mm Right Angle / Straight / Dual Entry Type


Specifications

Current Rate:2 AMP
Insulation Resistance:1000MΩ Min.
Contact Resistance:20mΩ Max.
Dielectric Voltage:500V AC for one minute
Operation Temperature:-40°C to +105°C



Material

Insulator:P.B.T or Hi-Temp. Thermoplastic, UL 94V-0
Terminal:Copper Alloy
Plating:Gold Plated

ORDER INFORMATION

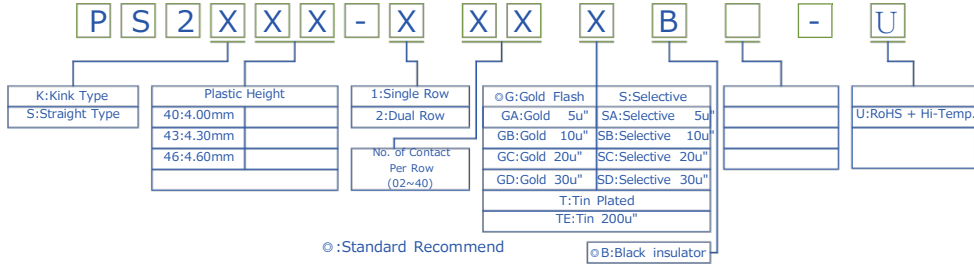


Female Header 2.0mm 1 & 2 Row H=4.0/4.3/4.6mm Straight Type

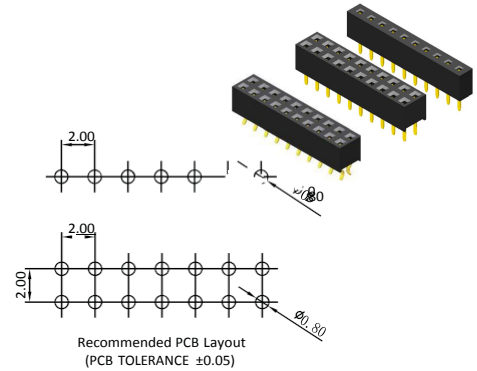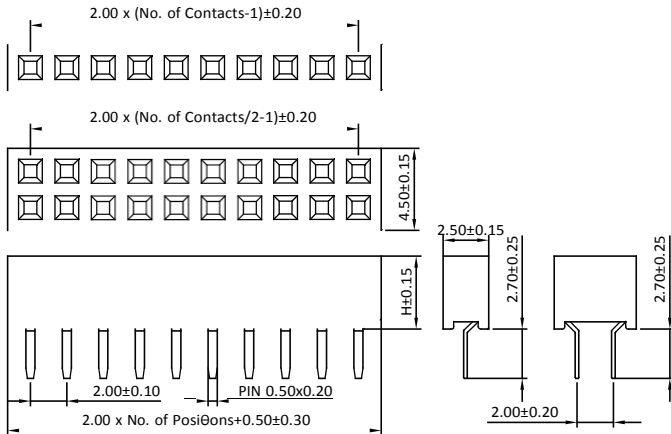



Part No.:PS2S40/43/46-1/2XX-U

Female Header 2.0mm 2 Row H=4.6mm Kinked Type

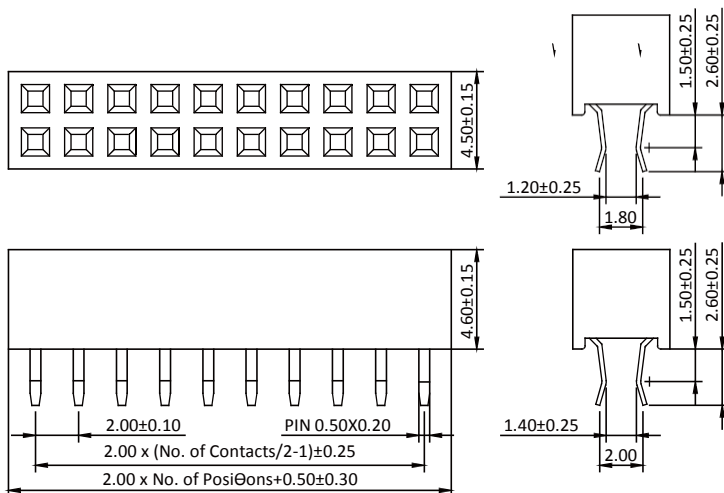

Type 1

Type 2

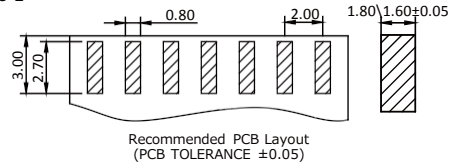

Part No.PS2K46-2XX-U

Female Header 2.0mm