

Female Header 2.0mm Right Angle / Straight / Dual Entry Type

Specifications

Current Rate:2 AMP

Insulation Resistance:1000MΩ Min.

Contact Resistance:20mΩ Max.

Dielectric Voltage:500V AC for one minute

Operation Temperature:-40°C to +105°C


Material

Insulator:P.B.T or Hi-Temp. Thermoplastic, UL 94V-0


Terminal: Copper Alloy

Plating:Gold Plated

ORDER INFORMATION

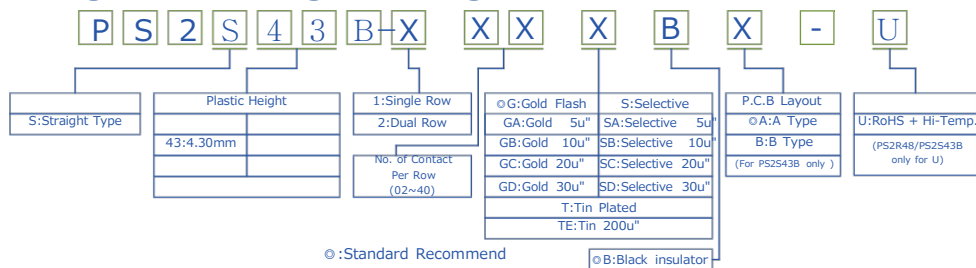

Female Header 2.0mm 1 & 2 Row H=4.3mm Dual Entry

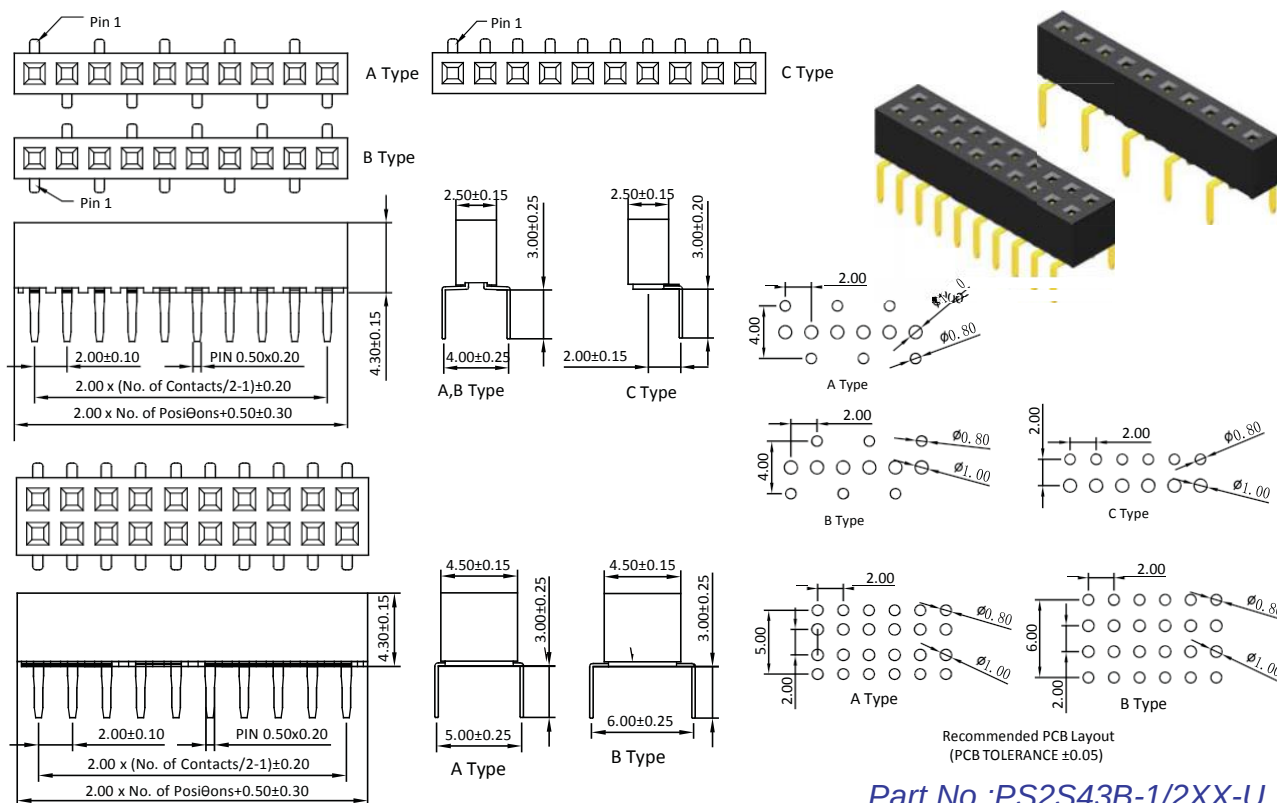

Part No.:PS2S43B-1/2XX-U

Female Header 2.0mm