

Female Header 2.0mm Straight With Bump / Bottom Close Straight / Straight / Kinked Type

Specifications

Specifications

Current Rate:2 AMP

Insulation Resistance:1000MΩ Min.

Contact Resistance:20mΩ Max.

Dielectric Voltage:500V AC for one minute

Operation Temperature:-40°C to +105°C



Material

Insulator:P.B.T or Hi-Temp. Thermoplastic, UL 94V-0
Terminal:Copper Alloy
Plating:Gold Plated

ORDER INFORMATION

P S 2 S 6 3 - X X X B T - X
 S: Straight Type
 Plastic Height
 1: Single Row
 2: Dual Row
 3: Triple Row
 4: Quadruple Row
 63: 6.35mm
 (3 & 4 for PS2563 only)
 ◎ G: Gold Flash
 GA: Gold 5u"
 GB: Gold 10u"
 GC: Gold 20u"
 GD: Gold 30u"
 S: Selective
 SA: Selective 5u"
 SB: Selective 10u"
 SC: Selective 20u"
 SD: Selective 30u"
 T: Tin Plated
 TE: Tin 200u"
 ◎ T: Tube
 L: RoHS + P.B.T
 U: RoHS + Hi-Temp.
 ◎ Standard Recommend
 No. of Contact Per Row (02~40)
 ◎ B: Black Insulator

Female Header 2.0mm 1 & 2 & 3 & 4 Row H=6.35mm Straight Type

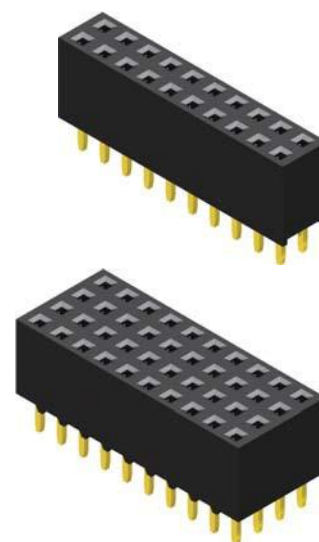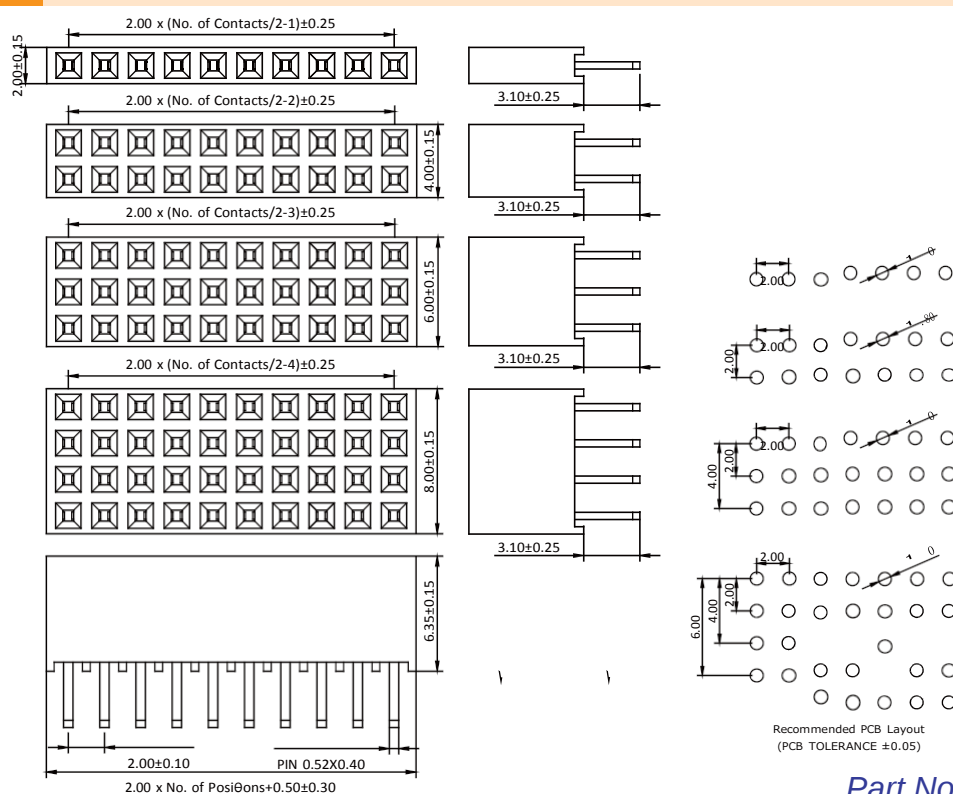

Part No.:PS2S63-1/2/3/4XX-L/U

Female Header 2.0mm