

Female Header 1.27mm 1 & 2 Row SMT Type

Specifications

Current Rate:1 AMP

Insulation Resistance:1000MΩ Min.

Contact Resistance:20mΩ Max.

Dielectric Voltage:500V AC for one minute

Operation Temperature: -40°C to +105°C


Material

Insulator: Hi-Temp. Thermoplastic, UL 94V-0


Terminal:Copper Alloy

Plating:Gold Plated

ORDER INFORMATION

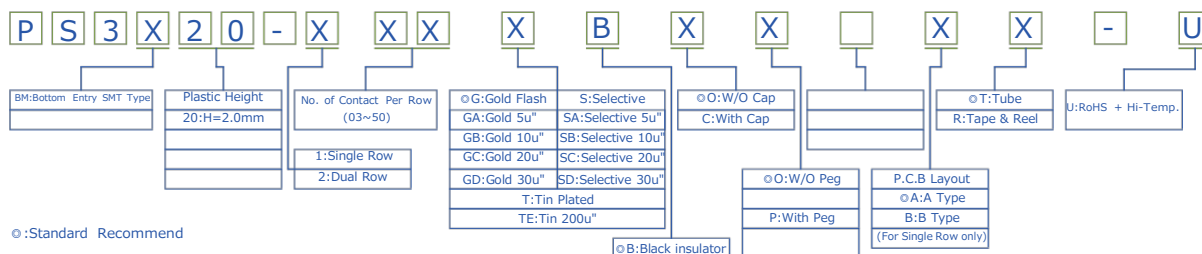

Female Header 1.27mm 1 & 2 Row H=2.0 Bottom Entry SMT Type

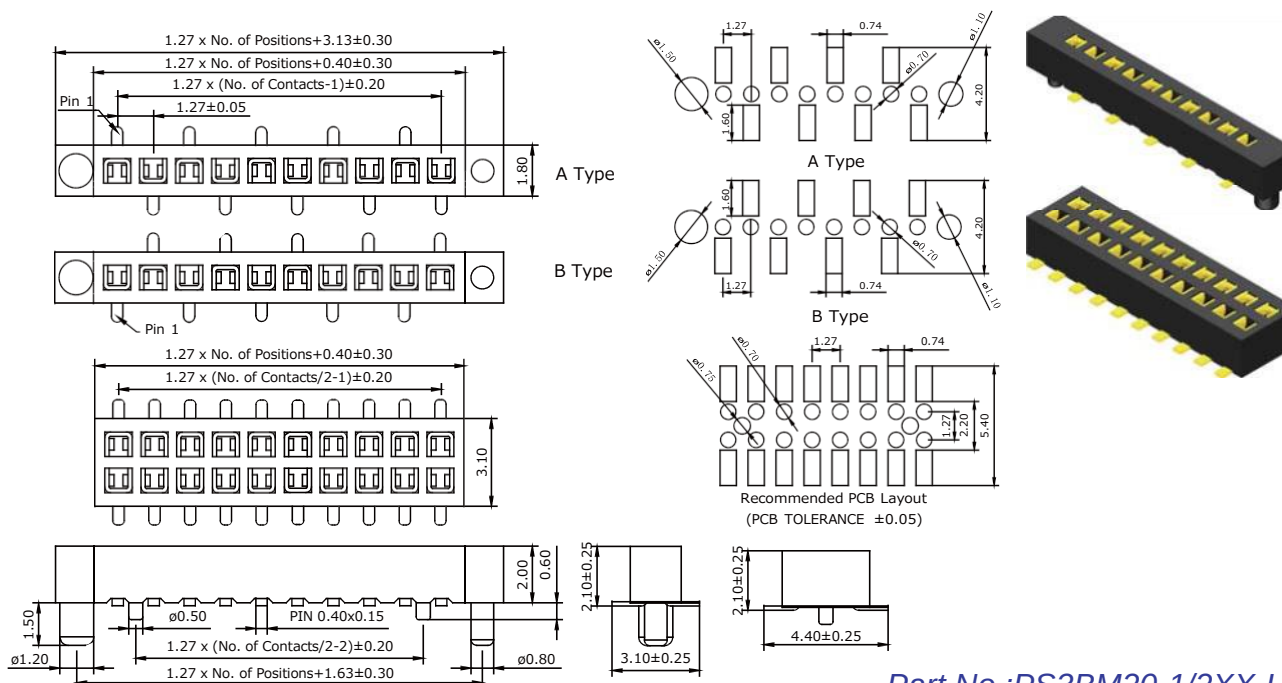

Part No.:PS3BM20-1/2XX-U

Female Header 1.27mm