

Female Header 1.27mm 1 & 2 Row SMT Type


Specifications

Current Rate:1 AMP
Insulation Resistance:1000MΩ Min.
Contact Resistance:20mΩ Max.
Dielectric Voltage:500V AC for one minute
Operation Temperature:-40°C to +105°C


Material

Insulator:Hi-Temp. Thermoplastic, UL 94V-0
Terminal:Copper Alloy
Plating:Gold Plated

ORDER INFORMATION

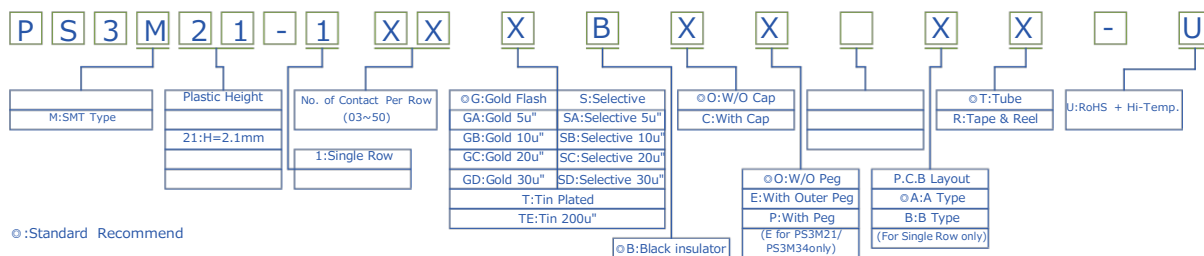

Female Header 1.27mm 1 Row H=2.1mm SMT Type

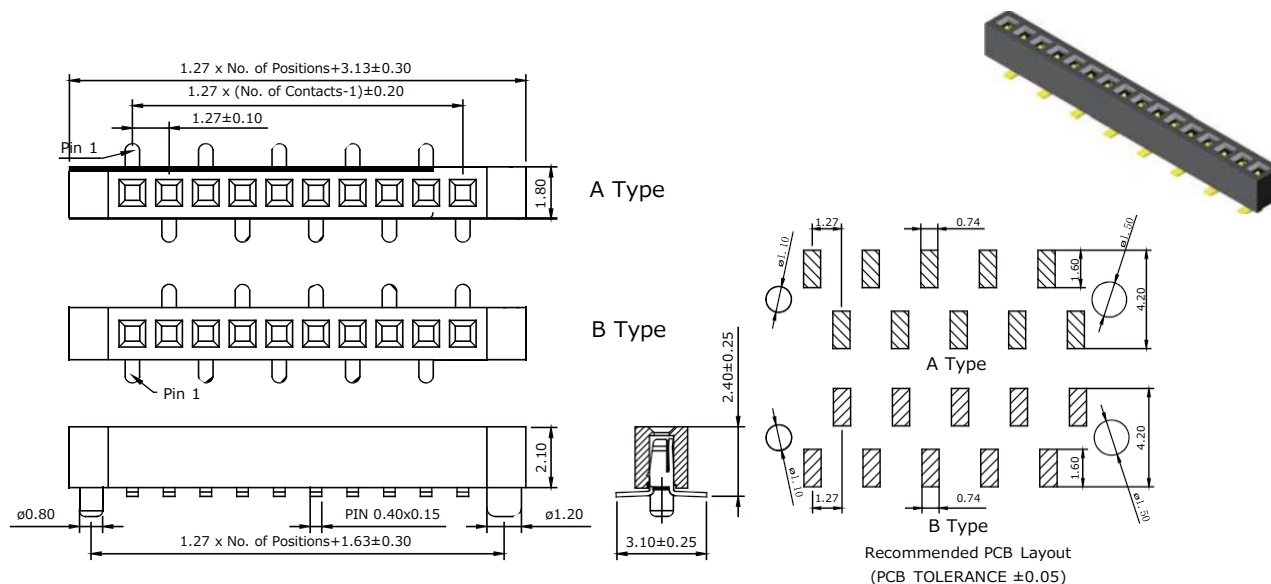

Part No.:PS3M21-1XX-U