

Female Header 1.27mm 1 & 2 Row SMT Type


Specifications

Current Rate:1 AMP
 Insulation Resistance:1000MΩ Min.
 Contact Resistance:20mΩ Max.
 Dielectric Voltage:500V AC for one minute
 Operation Temperature:-40°C to +105°C


Material

Insulator:Hi-Temp. Thermoplastic, UL 94V-0
 Terminal:Copper Alloy
 Plating:Gold Plated

ORDER INFORMATION

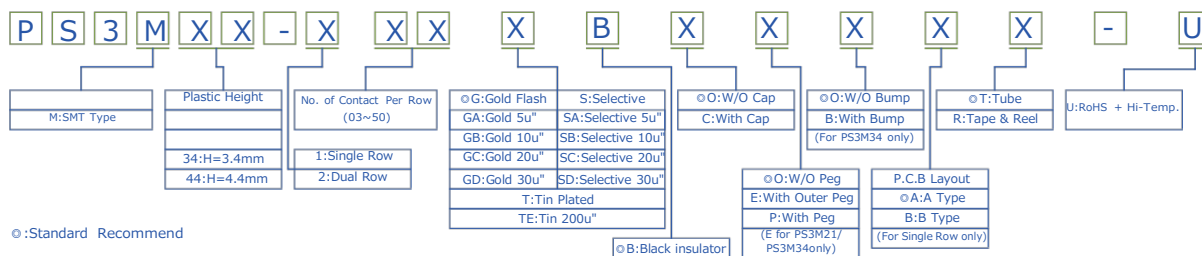


Female Header 1.27mm

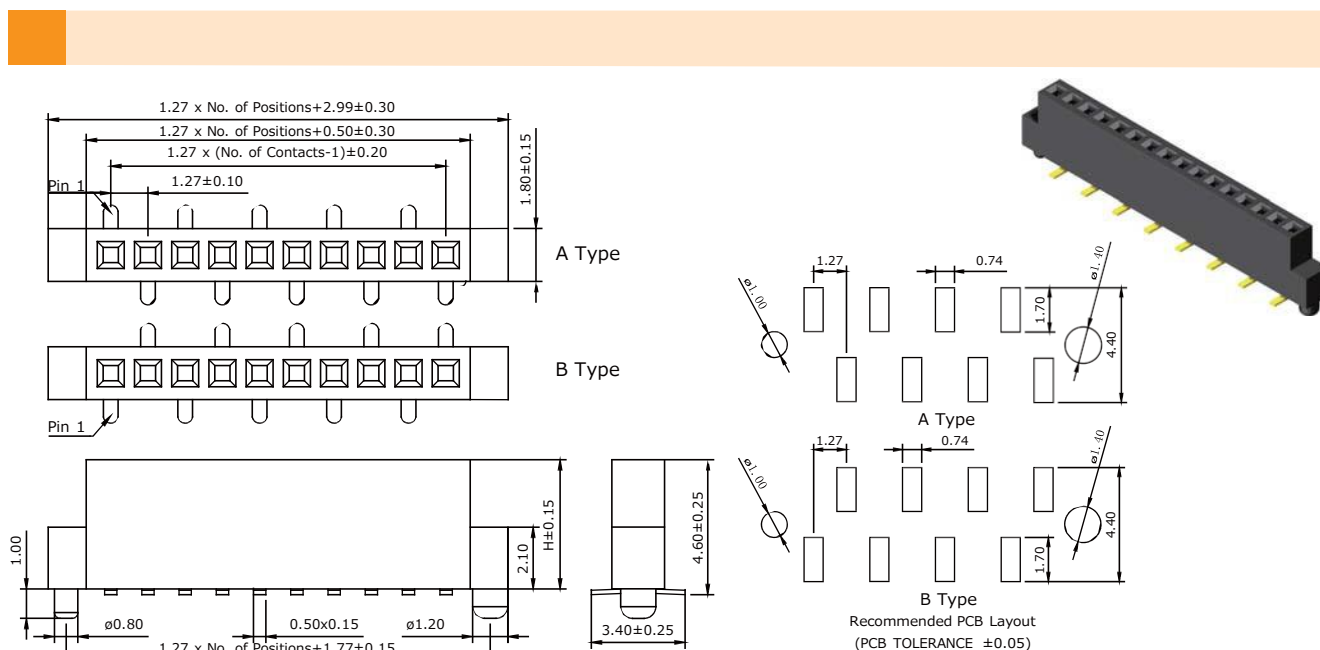

Part No.:PS3M34/44-1XX-U

Female Header 1.27mm 2 Row H=3.4/4.4mm SMT Type

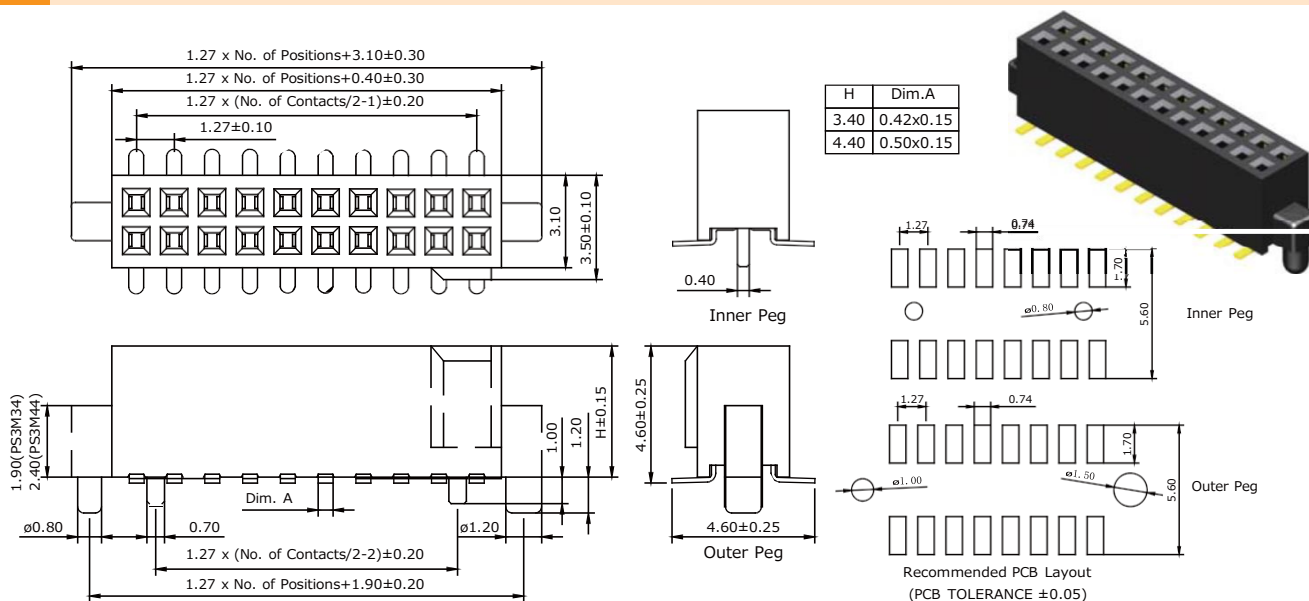

Part No.:PS3M34/44-2XX-U