

Female Header 1.27mm 1 & 2 Row R/A / Straight / Kinked / Side Entry SMT & Dip Type


Specifications

Current Rate:1 AMP
 Insulation Resistance:1000MΩ Min.
 Contact Resistance:20mΩ Max.
 Dielectric Voltage:500V AC for one minute
 Operation Temperature:-40°C to +105°C



Material

Insulator:Hi-Temp. Thermoplastic, UL 94V-0
 Terminal:Copper Alloy
 Plating:Gold Plated

ORDER INFORMATION

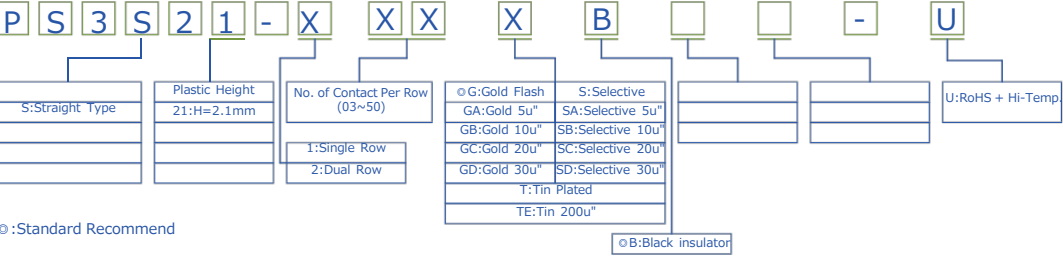

Female Header 1.27mm 1 & 2 Row H=2.1 Straight Type

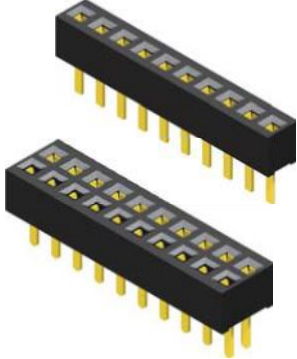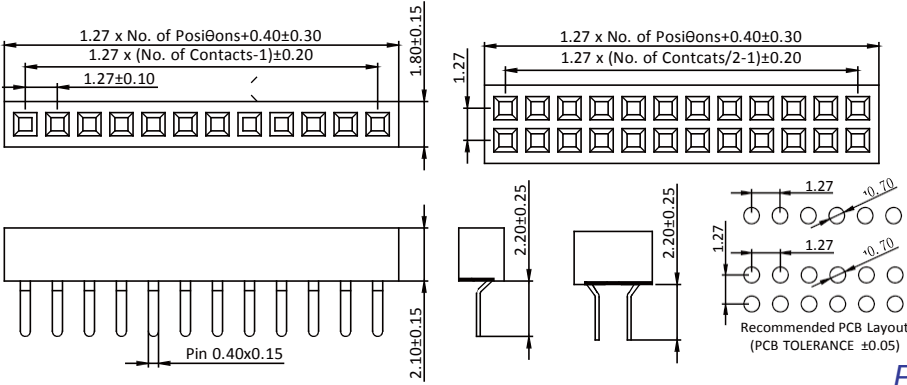

Part No.:PS3S21-1/2XX-U

Female Header 1.27mm