

Female Header 1.0mm SMT / SMT R/A Type


Specifications

Current Rate: 1 AMP
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 20mΩ Max.
Dielectric Voltage: 500V AC for one minute
Operation Temperature: -40°C to +105°C

Material




Insulator: Hi-Temp. Thermoplastic, UL 94V-0
Terminal: Copper Alloy
Plating: Gold Plated

ORDER INFORMATION

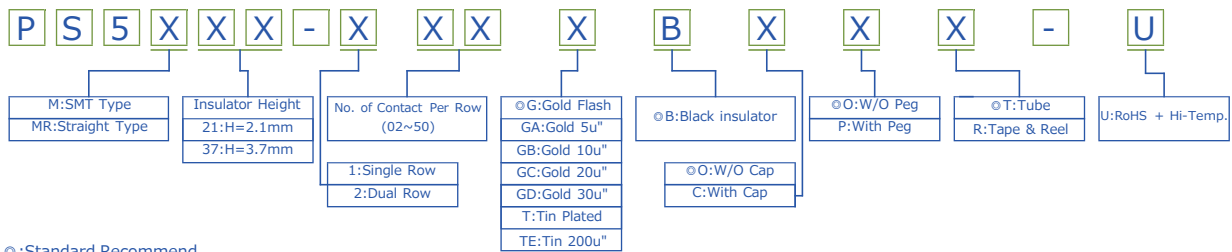




○: Standard Recommend

Female Header 1.0mm 1 Row H=2.1mm SMT Type

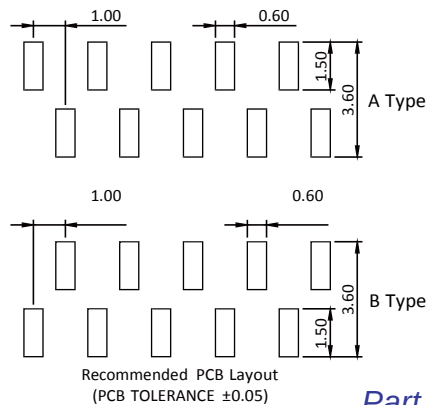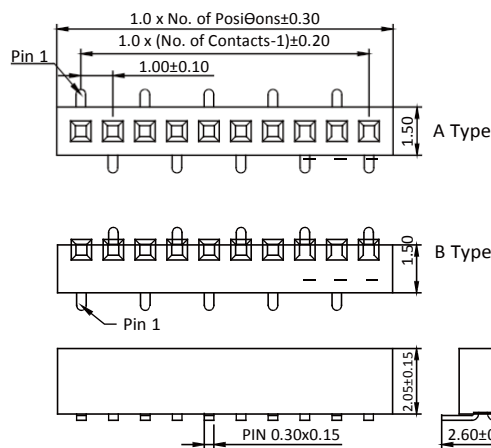




Part No.: PS5M21-1XX-U

Female Header 1.0mm 2 Row H=2.1mm SMT Type

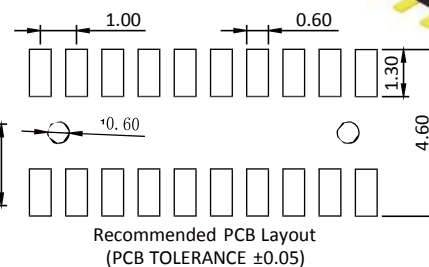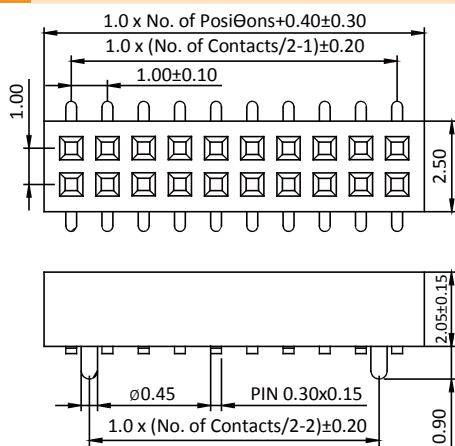

Part No.: PS5M21-2XX-U

Female Header 1.0mm 1 Row H=3.7mm SMT R/A Type

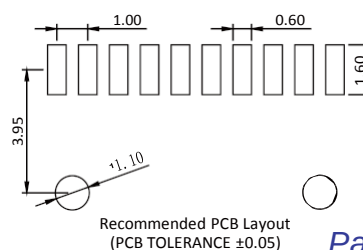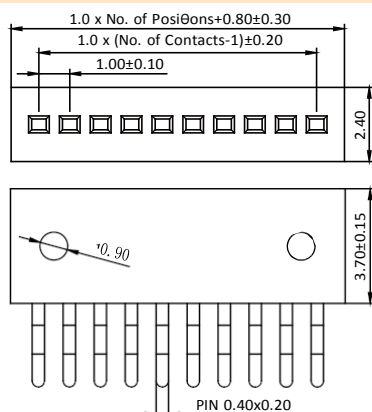

Part No.: PS5MR37-1XX-U