

Female Header 1.0mm Straight Type


Specifications

Current Rate:1 AMP
Insulation Resistance:1000MΩ Min.
Contact Resistance:20mΩ Max.
Dielectric Voltage:500V AC for one minute
Operation Temperature:-40°C to +105°C

Material





Insulator:Hi-Temp. Thermoplastic, UL 94V-0
Terminal:Copper Alloy
Plating:Gold Plated

ORDER INFORMATION

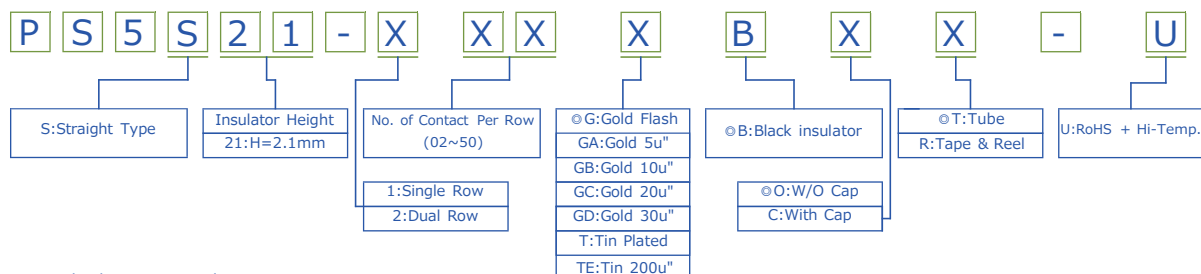





◎:Standard Recommend

Female Header 1.0mm 1 Row H=2.1mm Straight Type

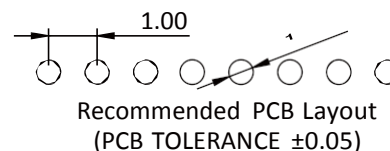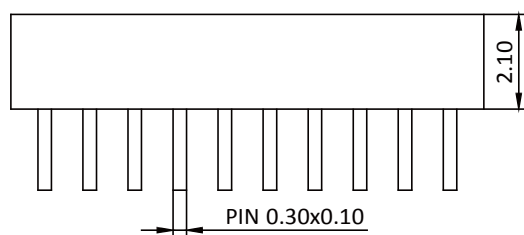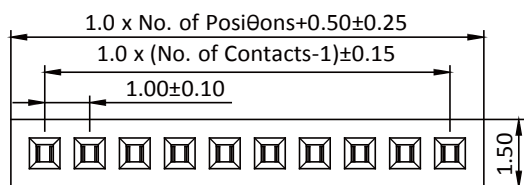

Part No.:PS5S21-1XX-U

Female Header 1.0mm 2 Row H=2.05mm Straight Type

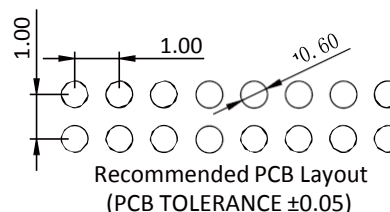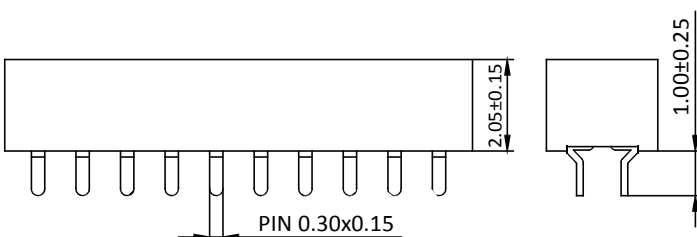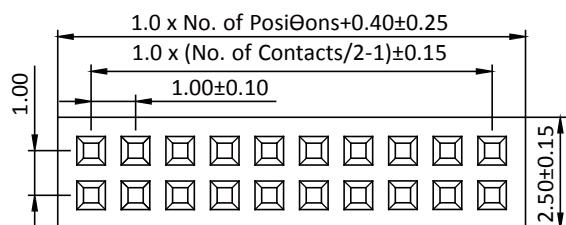

Part No.:PS5S21-2XX-U

Female Header 1.0mm