

S.ATA Conn. Series

SPECIFICATION

Current Rate:1.5 AMP

Insulation Resistance:1000M Ω Min

Contact Resistance:30 m Ω Max

Dielectric Voltage:500V AC for one minute

Operation Temperature:-55° C to +125° C



MATERIAL

Insulator:Polyester,UL 94V-0

©Standard:PBT

Contact Pin:Phosphor Bronze

Contact Plating:Gold Flash all over

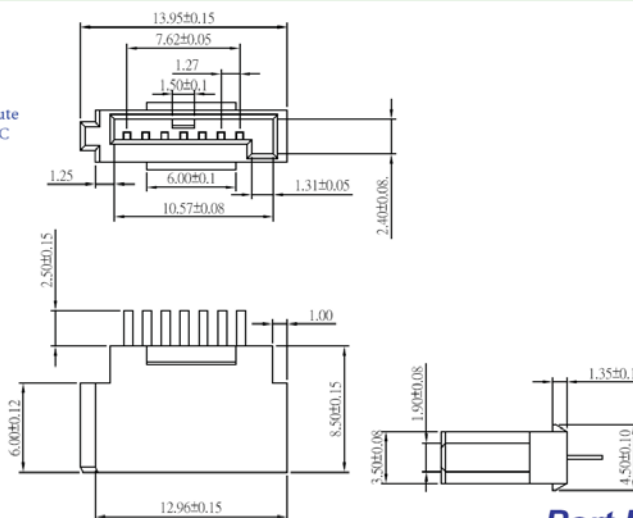

Part No.:SATAS-F07SB-L

SPECIFICATION

Current Rate:1.5 AMP

Insulation Resistance:1000M Ω Min

Contact Resistance:30 m Ω Max

Dielectric Voltage:500V AC for one minute

Operation Temperature:-55° C to +125° C



MATERIAL

Insulator:Polyester,UL 94V-0

©Standard:PBT

Contact Pin:Phosphor Bronze

Contact Plating:Gold Flash all over

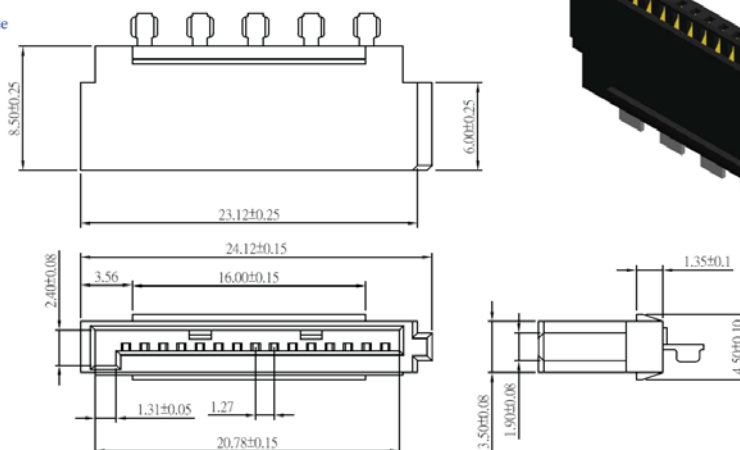

Part No.:SATAS-F15SB-L

SPECIFICATION

Current Rate:1.5 AMP

Insulation Resistance:1000M Ω Min

Contact Resistance:30 m Ω Max

Dielectric Voltage:500V AC for one minute

Operation Temperature:-55° C to +125° C



MATERIAL

Insulator:Polyester,UL 94V-0

©Standard:PBT

Contact Pin:Phosphor Bronze

Contact Plating:Gold Flash all over

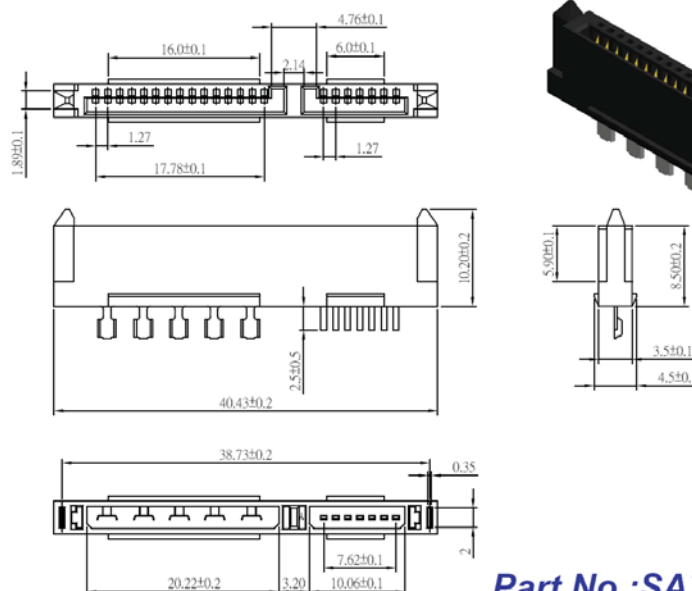

Part No.:SATAS-F22SB-L