


SMA Conn. Series



SMA007-M  **GW-L**
 5:50 Ω 7:75 Ω

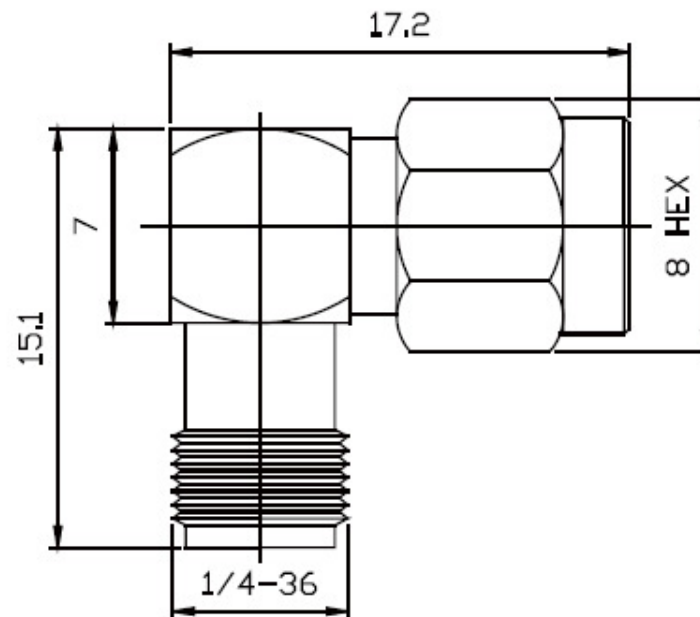

8	SHELL	BRASS	GOLD	1
7	GASKET	BRASS		1
6	RETAINING RING	BRASS	GOLD	1
5	DIELECTRIC	TEFLON		1
4	DIELECTRIC	TEFLON		1
3	PIN	BRASS	GOLD	1
2	BODY	BRASS	GOLD	1
1	BODY	BRASS	GOLD	1
NO	DESCRIPTION	MATERIAL	FINISH	QTY

IMPEDANCE		50/75 OHM
FREQUENCY		0-12 GHz
DIELECTRIC WITHSTANDING VOLTAGE 50 Hz RMS		1000V
WORKING VOLTAGE DC		500V
INSULATION RESISTANCE		5000 MEGOHMS MIN
CONTACT RESISTANCE	INNER CONDUCTOR	≤ 3 MILLIOHMS
	OUTER CONDUCTOR	≤ 0.5 MILLIOHMS
INSERTION LOSS (dB MAX.)	STRAIGHT CONNECTOR	.15 dB MAX. AT 1.0GHz
	RIGHT ANGLE CONNECTOR	.30 dB MAX. AT 1.0GHz

TOPTEK
 HARDWARE ELECTRONIC COMPONENTS



www.toptek-co.com