


Model No.:T1227S

Dimensions(mm):12x12x2.7

Operating Voltage(Vp-p): 1~25

Resonant Freq.(Hz):4000

SPL(dB):75

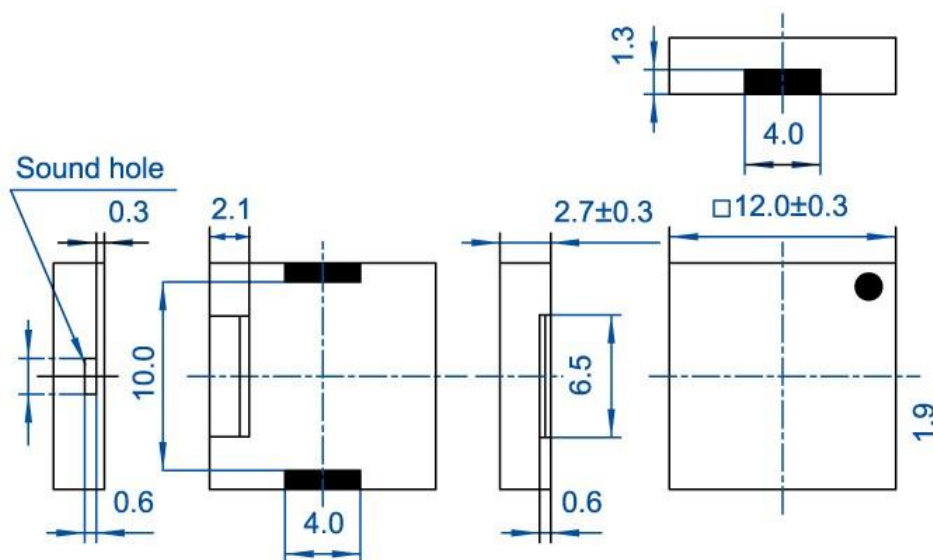



.	MODEL NO.	T1227S-HL-03-4.0-16-R
2	Rated Voltage (Vp-p)	3
3	Resonance Frequency (KHz)	4.0 $\pm$ 0.5
4	Max Input Voltage (Vp-p)	25
5	Capacitance at 120Hz (pF)	16000 $\pm$ 30%
6	*Sound Output at 10cm (dB)	$\geq$ 75
7	Operating Temperature ($^{\circ}$ C)	-20 $\sim$ +70
8	Storage Temperature ($^{\circ}$ C)	-30 $\sim$ +80
9	*Rated Current (mA)	$\leq$ 5
10	Weight (g)	0.3
11	Housing Material	LCP
12	RoHS	Yes